

DATA	20.03.2019
CUSTOMER	
REFERENCE	

Evaporator Model		P12-130 Ev-F
Number of circuits		1 1
Requested capacity	kW	245
Margin	%	4
PED category		---

INPUT DATA		PRIMARY SIDE	SECONDARY SIDE
Refrigerant		R407C	
Evaporating Temperature	°C	5 (Dew)	
Evaporating Pressure	bar A	5,469	
Superheating	K	5	
Condensing Temperature	°C	45 (Dew)	
Condensing Pressure	bar A	17,536	
Subcooling	K	5	
Pressure drop	kPa	100	
Fluid			WATER
Inlet Temperature	°C		15
Outlet Temperature	°C		10
Flow rate	m³/h		42,11
Pressure drop	kPa		117,1
Fouling factor	(m² K)/W		0,000043
Velocity (Inside)	m/s	---	0,48
Exchange coefficient	W/(m² K)	7467	12927
DTML	°C		7,21

WARNING

Water nozzle inlet velocity higher than allowed limits.
Nozzle outlet velocity higher than allowed limits.
Pressure drops water side higher than allowed limits.

DIMENSIONS

Surface	m²	15,60	
Weight	kg	57	
Channel volume	dm³	24,3	24,7
Height	mm	617	
Width	mm	188	
Depth	mm	308,3	
Connections		ODS 28/ODS 54	2" G/2" G

OFFER


Unit net price	Euro	
----------------	------	--

NOTES

--

DATA	20.03.2019
CUSTOMER	
REFERENCE	

DRAWING

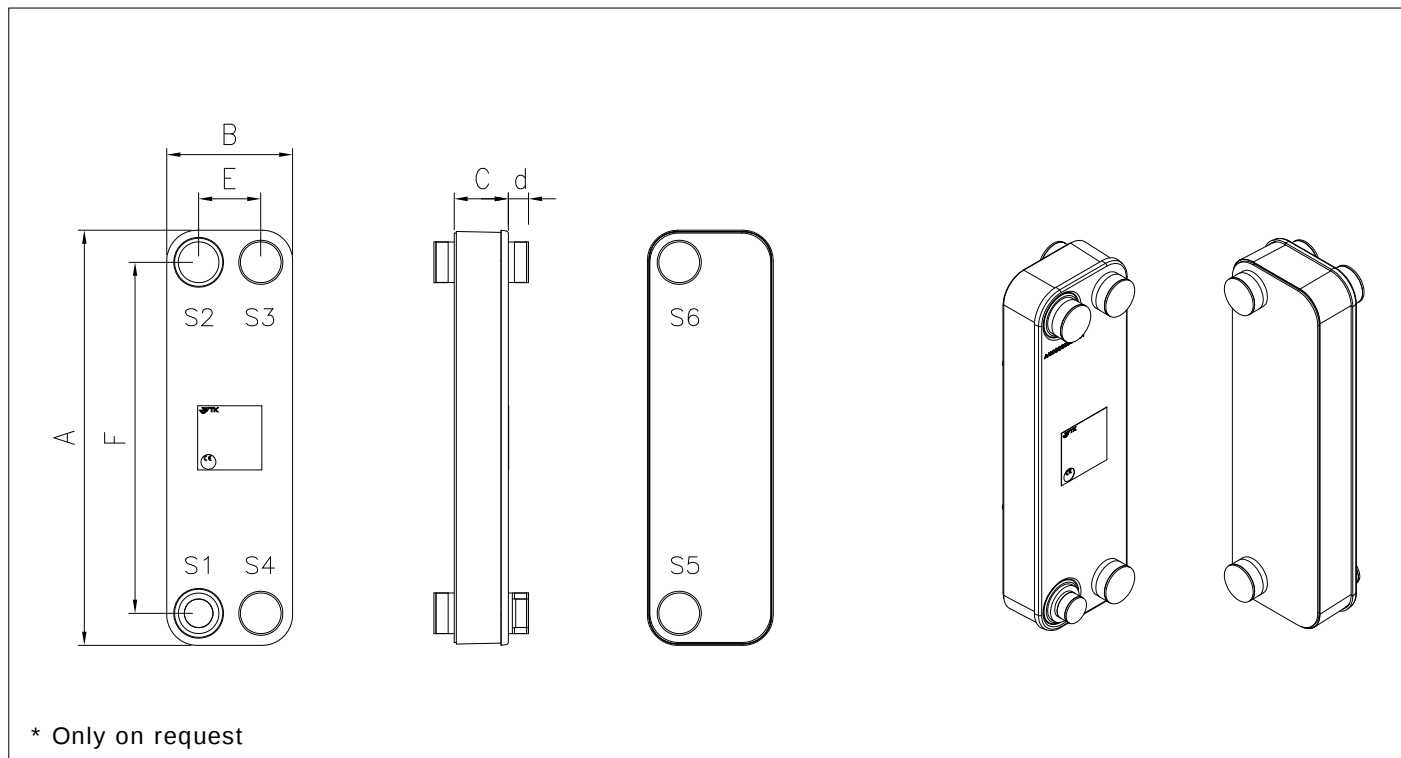

DIMENSIONS (mm)

DATA

A	617	S1	ODS 28	Surface	m?	15,60
B	188	S2	ODS 54	Weight	kg	57
C	308,3	S3	2" G			
E	92	S4	2" G			
F	519	S5 *	2" G			
G	--	S6 *	2" G			
d	27	S7	--			
		S8	--			

This software is only to be used as an assistance and does not replace the necessary specialist knowledge and experience when designing heat exchangers. We continuously work in order to improve and correct the software. Nevertheless we cannot guarantee its absolute infallibility. Therefore the use of the program is at the user's risk.